


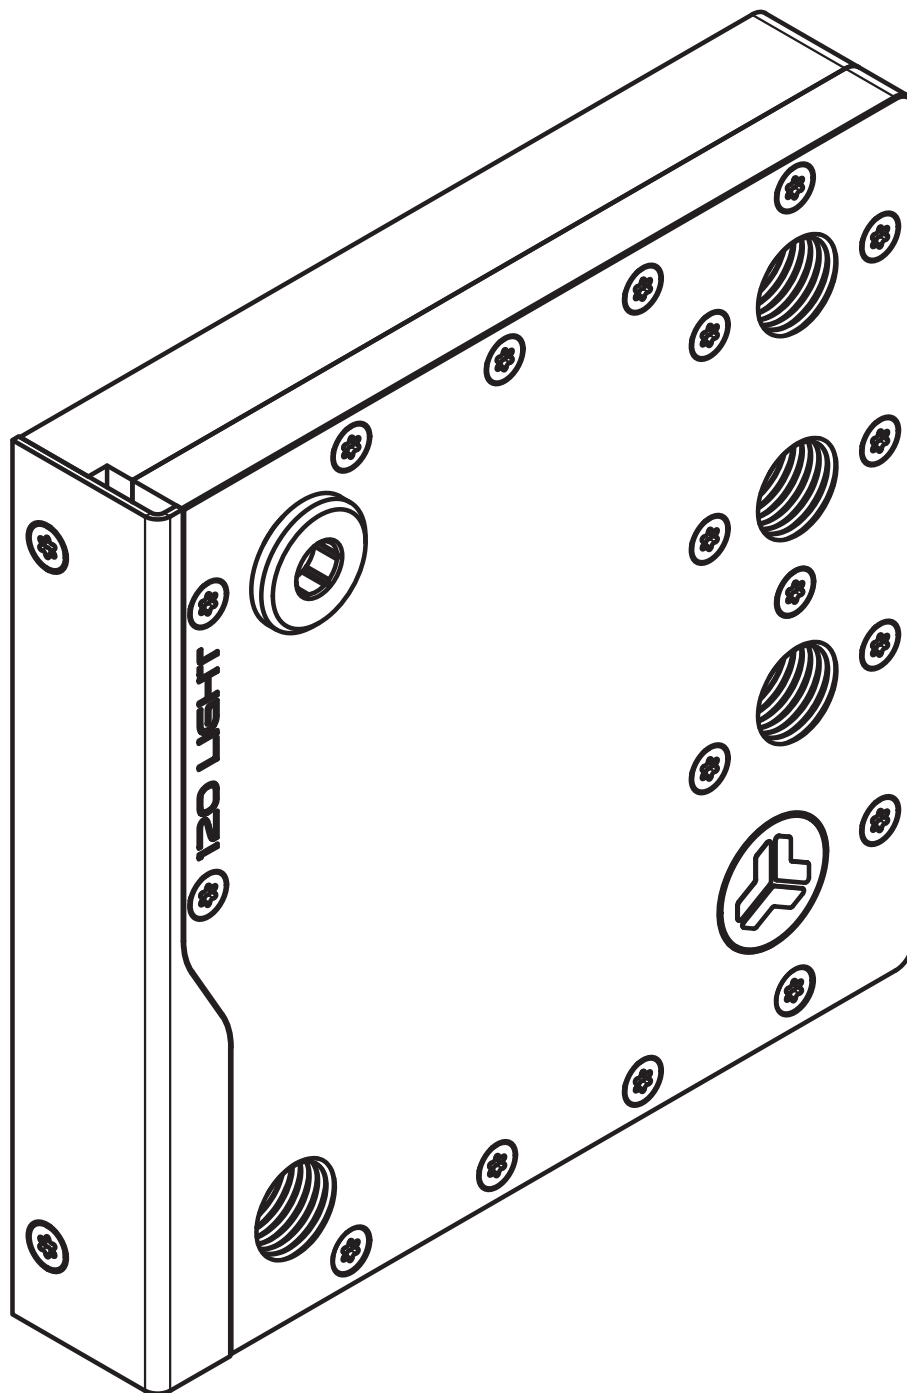

SKU: SW10164
EAN: 4260754980973

HIGH QUALITY

MADE IN GERMANY

**TABLE OF CONTENTS**


1.	PACKAGING CONTENT WARNING	3
2.	DIMENSIONS (mm)	4
3.	FLOW DIAGRAM	6
4.	RECOMMENDED DISTRO PLATE CONFIGURATION	7
5.	INSTALLING THE DISTROBUTION PLATE	8
6.	CONNECTING THE D-RGB CABLE	10
7.	INSTALLING THE CONNECTIONS	10
8.	CLEANING & CARE.....	10
9.	SUPPORT AND SERVICE.....	10

Before you start using this product please follow these basic guidelines


This product is intended for advanced users. Improper installation may result in damage to your equipment. While every effort has been made to provide the most comprehensive information possible, Stealkey Customs assumes no liability, express or implied, for damage to your components resulting from the use of Stealkey Customs cooling products, whether due to errors or omissions on our part in the instructions below, or due to errors or defects in Stealkey Customs cooling products. Do not disassemble the distro plate. Doing so will void the warranty. Turn off your system and discharge your body's static charge before proceeding with the installation. If you do not feel comfortable performing the installation procedure, contact a qualified computer technician.





1. BOX CONTENTS

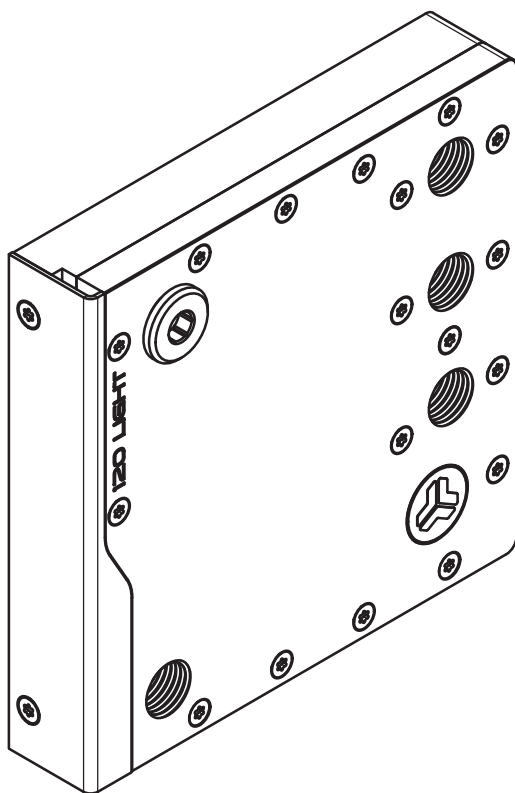


SC 120 Light Distroplate D-RGB (1 pcs)




M4 x 5 mm for mounting
directly to the case (4 pcs)

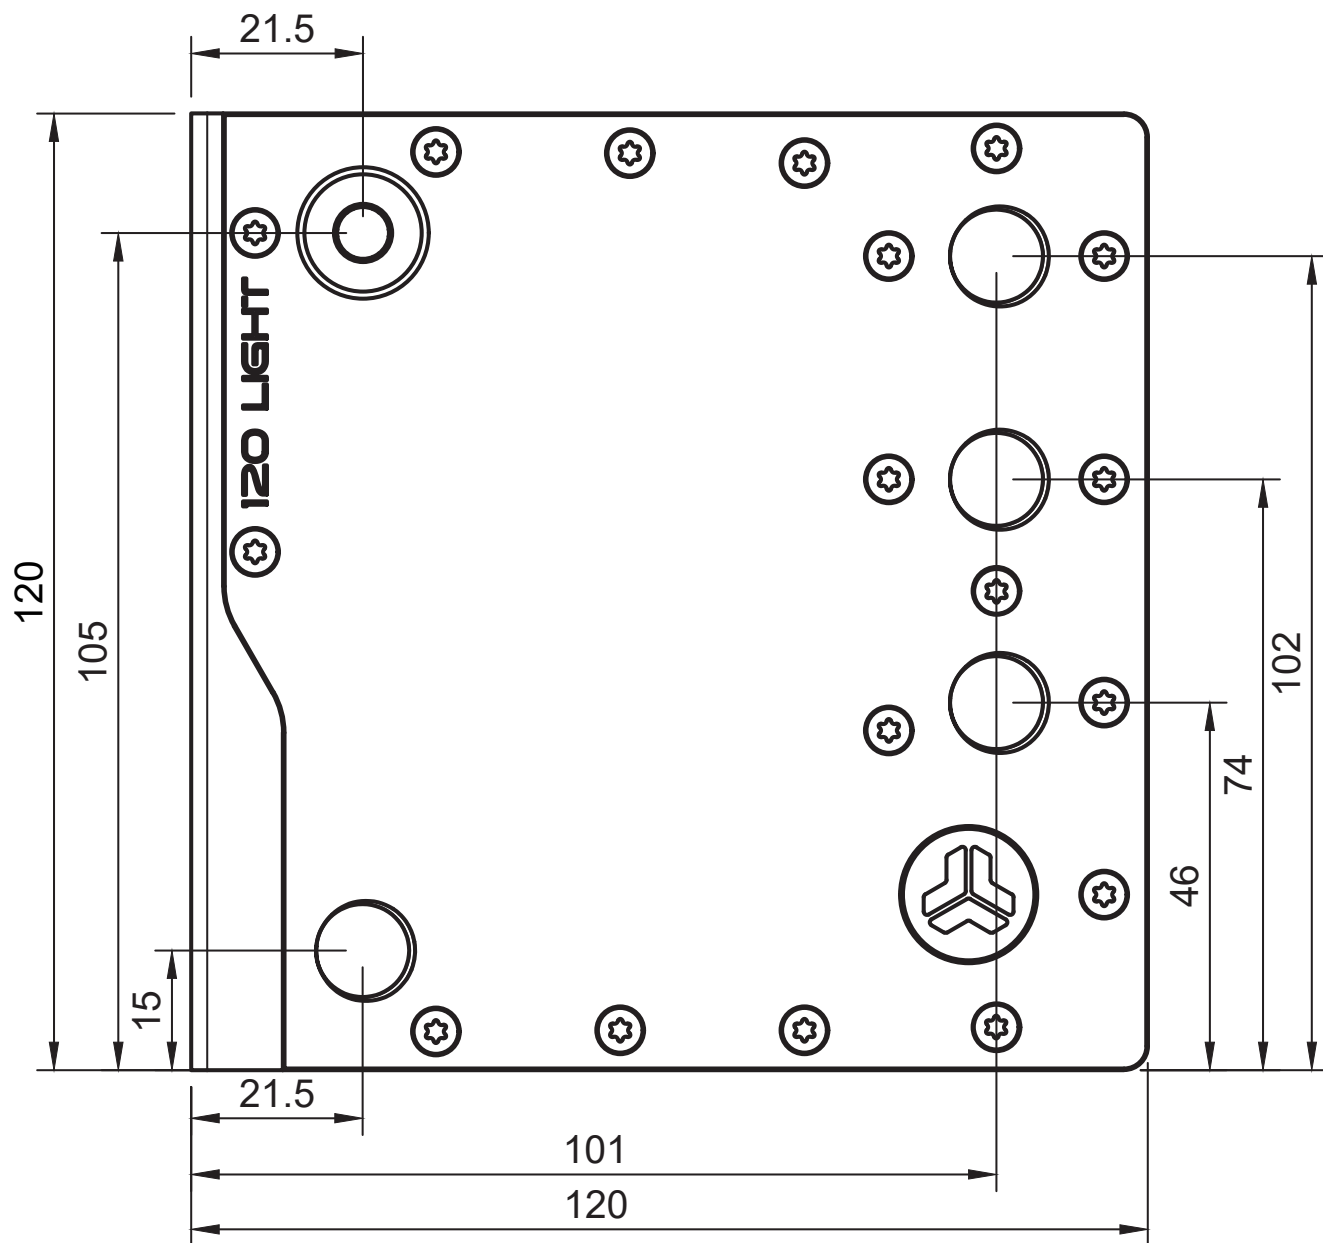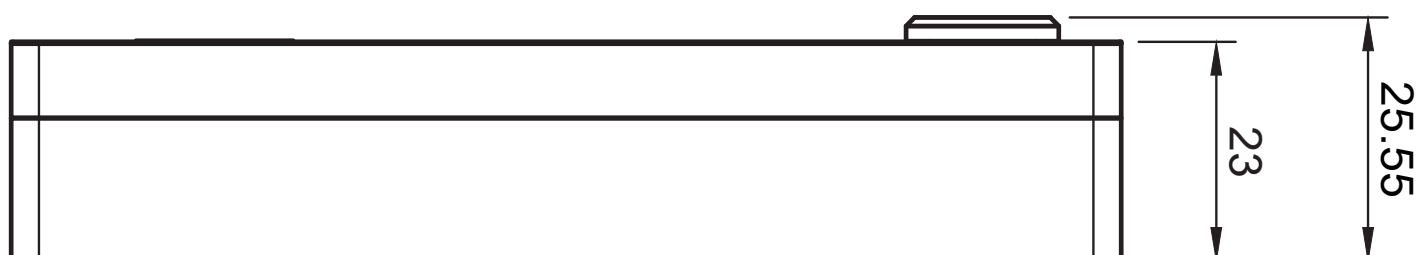2. DIMENSIONS (mm)
FRONT

SIDE

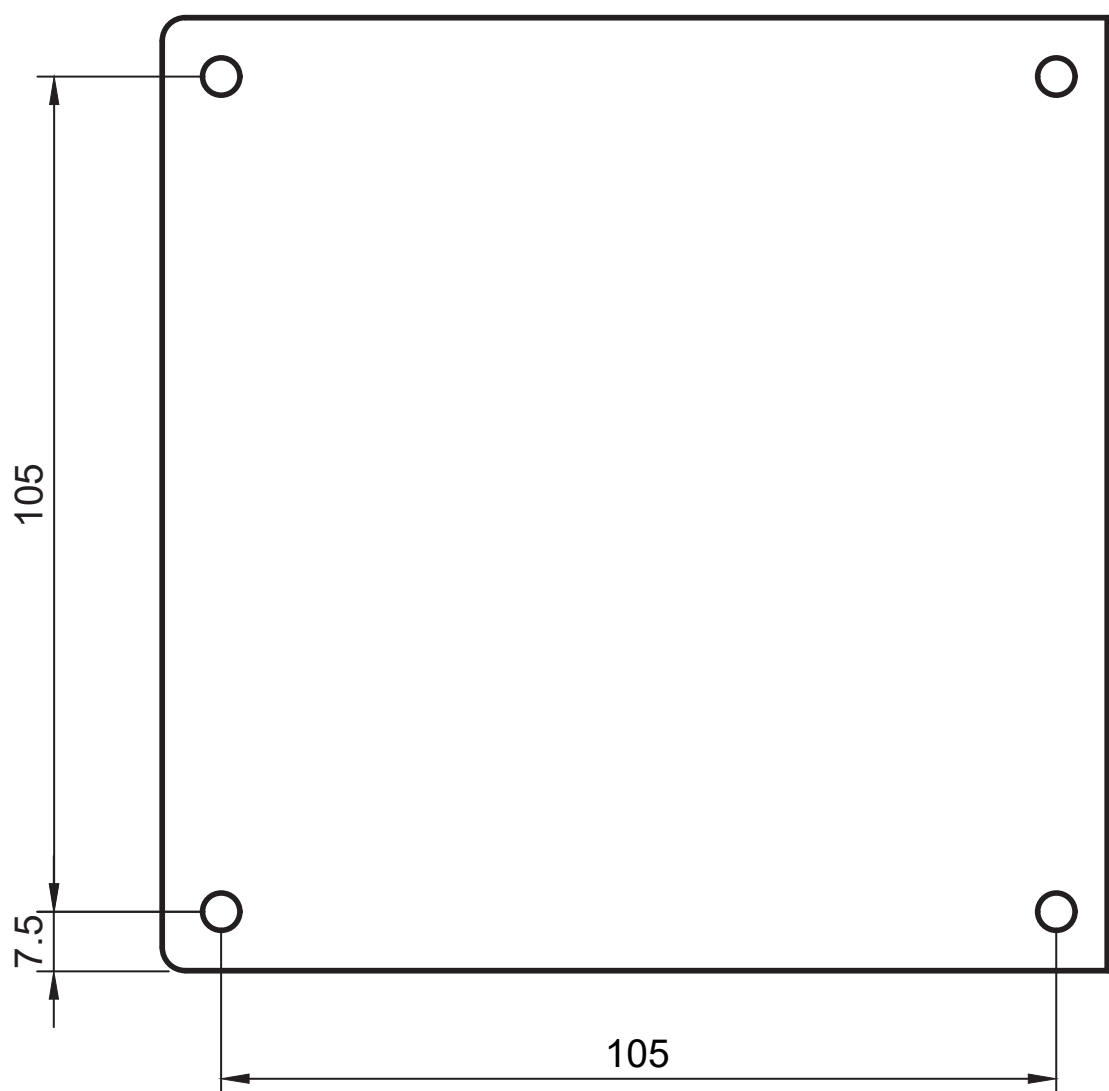
BACK

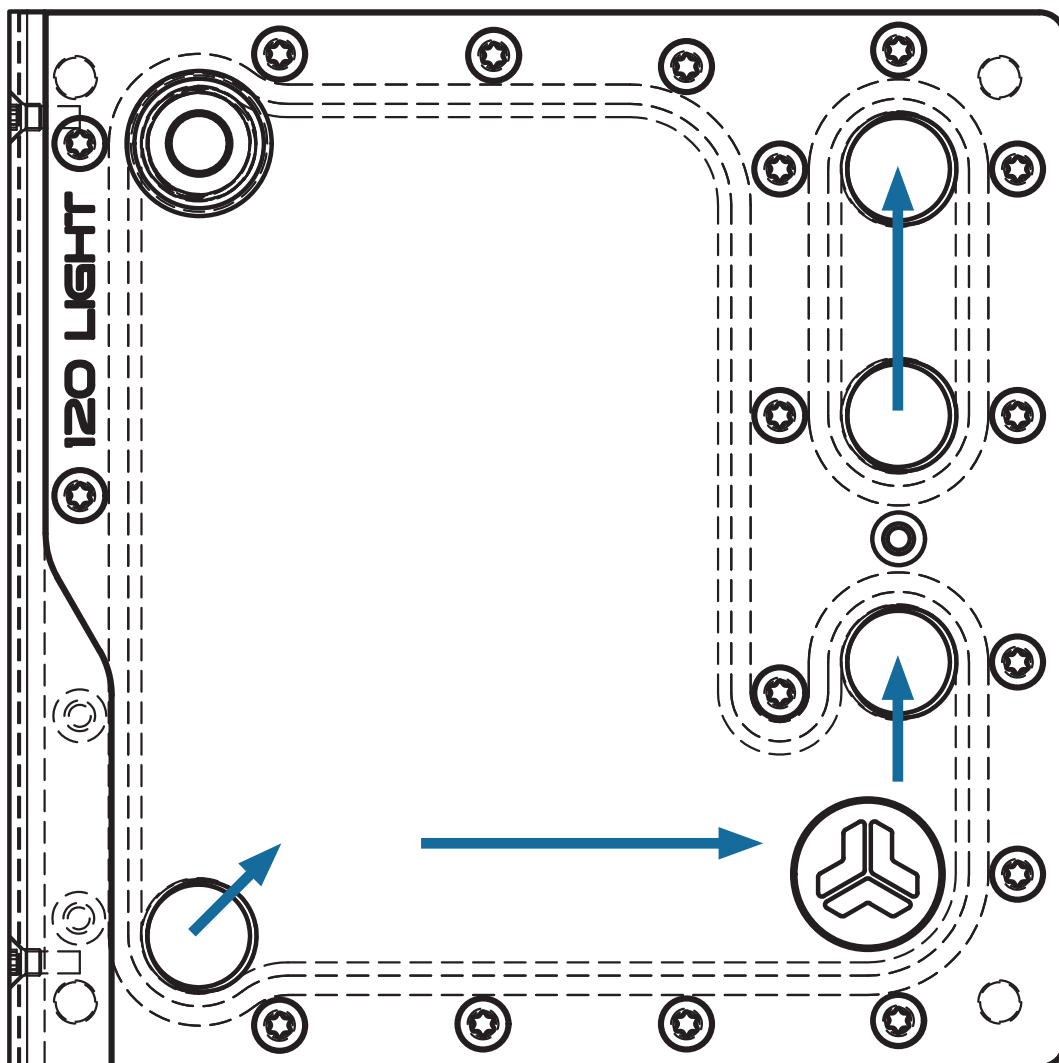


3. FLOW DIAGRAM





4. RECOMMENDED DISTRO PLATE CONFIGURATION

FRONT VIEW

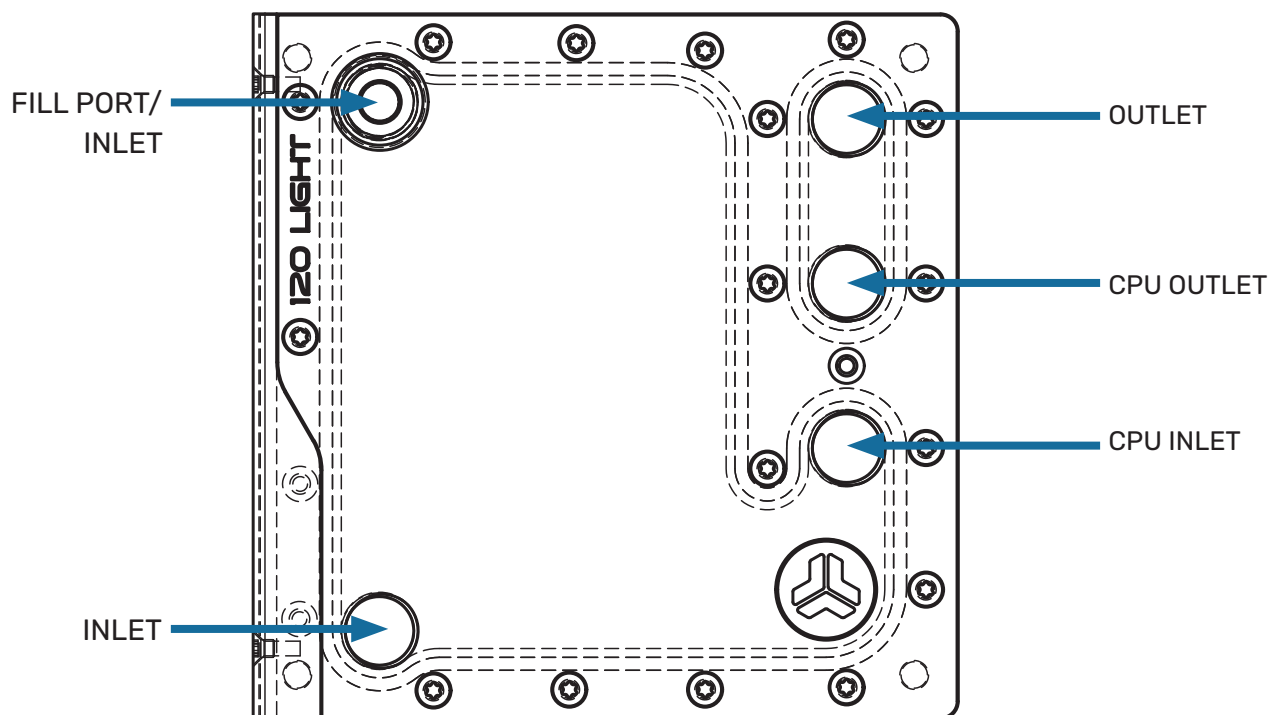




5. INSTALLING THE DISTRIBUTE PLATE


STEP 1

The distro plate is intended to be mounted on the rear 120 mm standard fan above the PCIe slot.

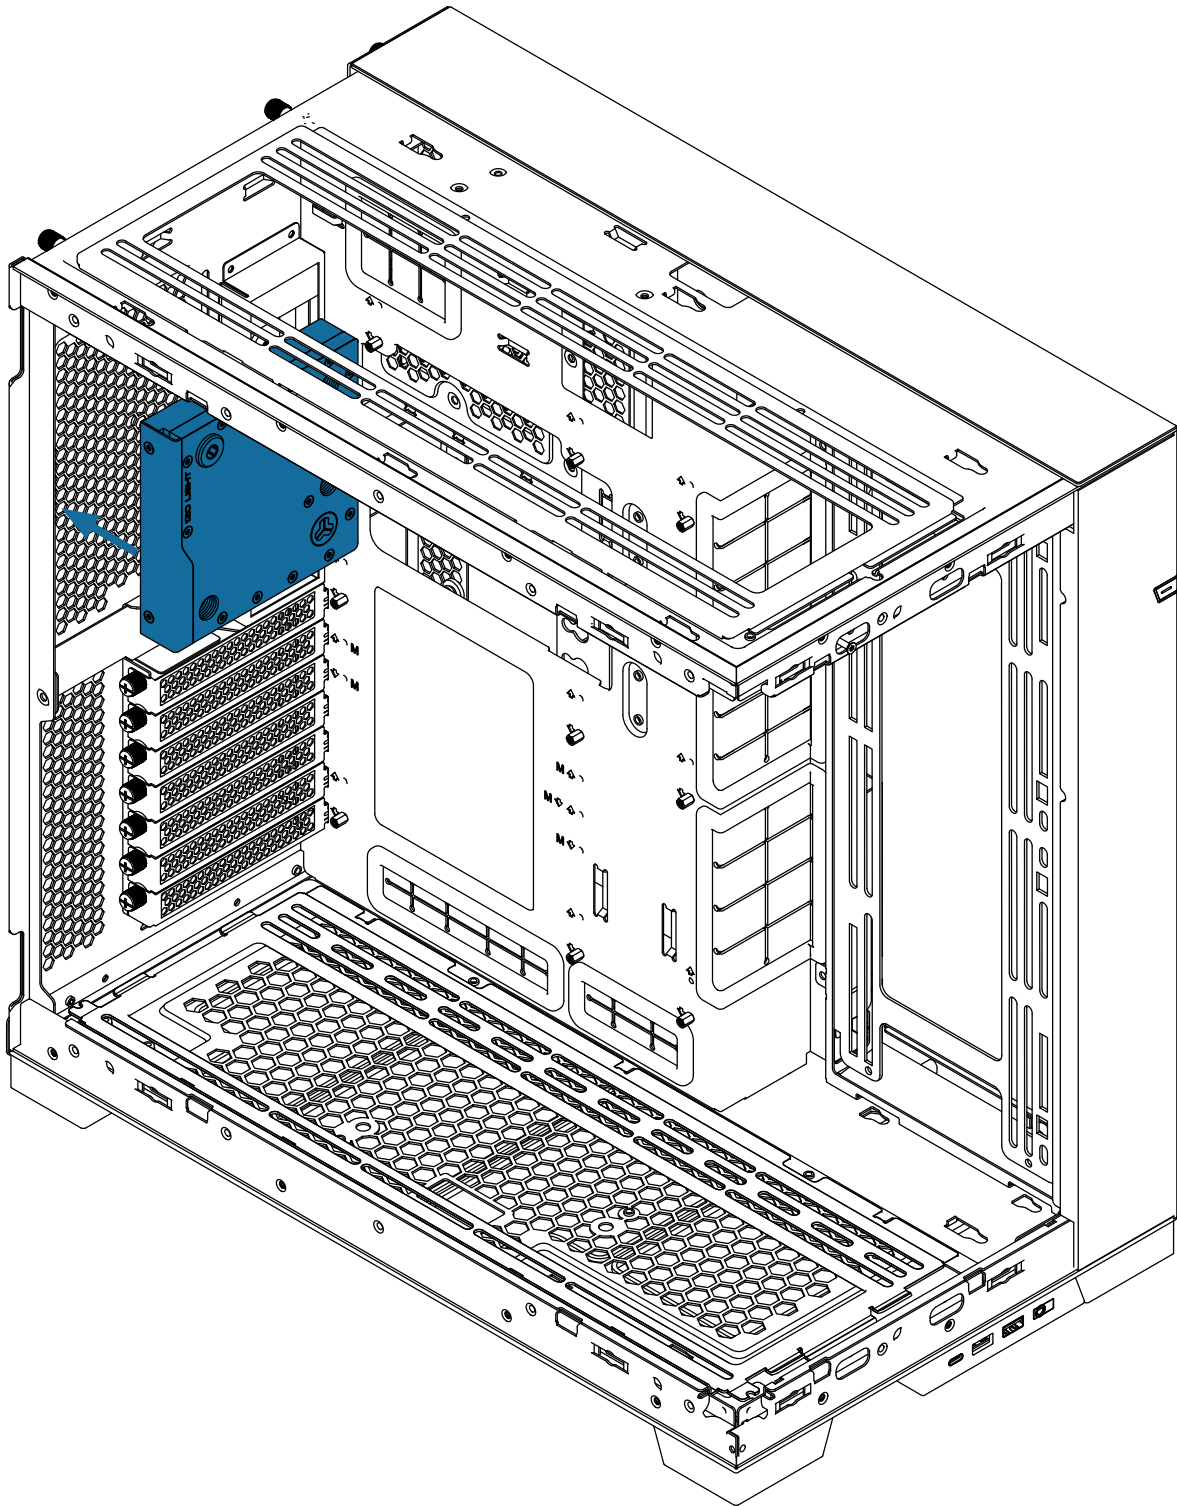


**STEP 2**

Attach the Distroplate to the case with the included M4 x 5 mm screws.

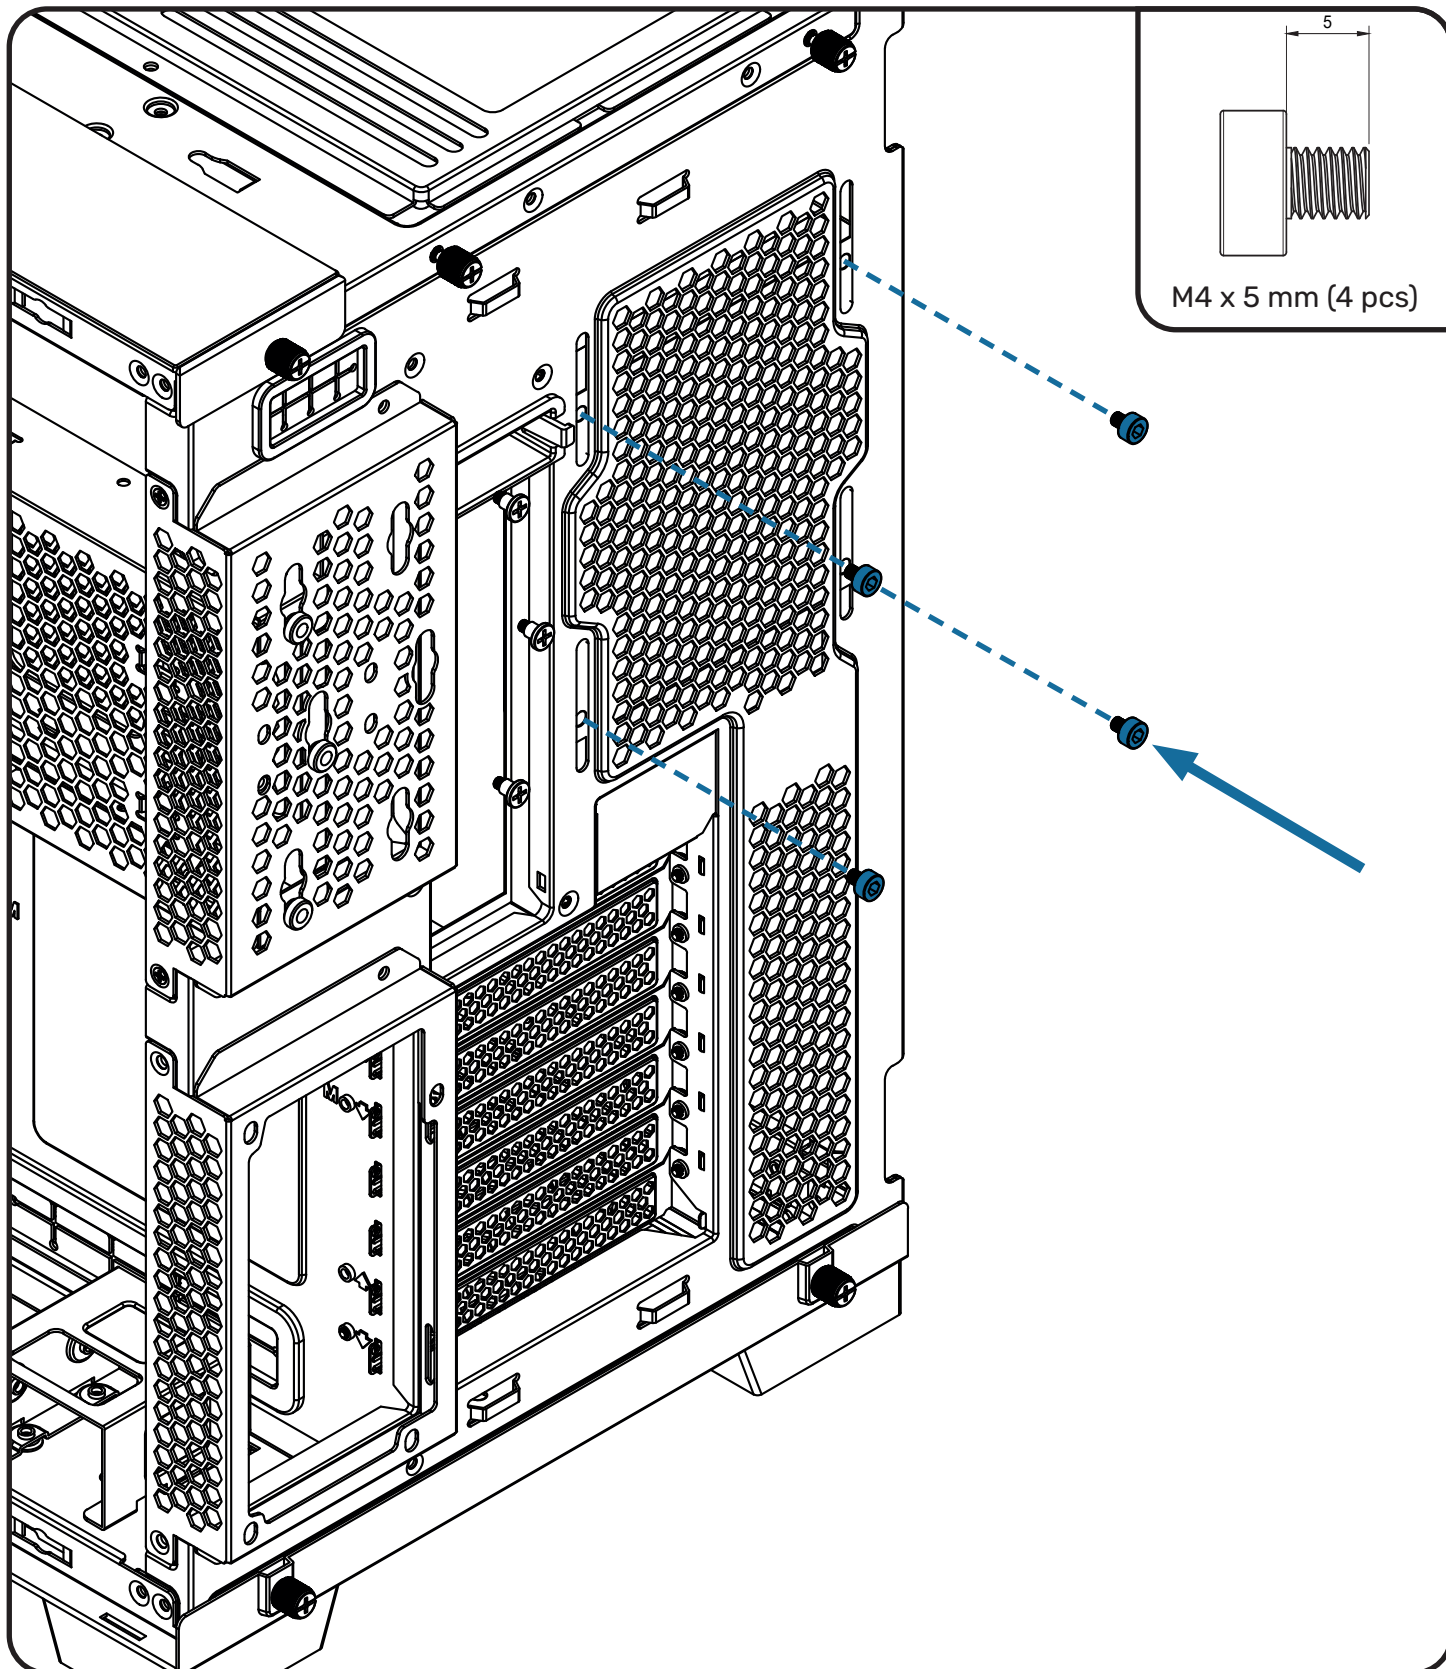

6. CONNECTING THE D-RGB CABLE

Connect the D-RGB cable to a compatible motherboard (3-Pin ARGB Connector).

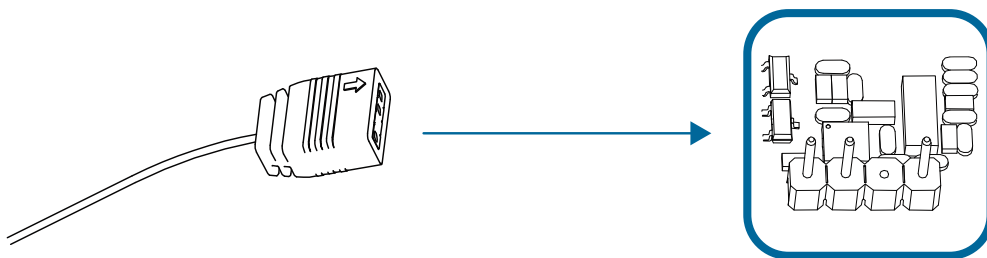

7. INSTALLING THE CONNECTIONS

Mount the connections with G1/4 thread and close the remaining connections with stop fittings. Always perform a leak test before applying power to the system components (max. 0,5 bar).

Carefully loosen the shut-off valve of the filling connection to allow trapped air to escape.

8. CLEANING & CARE

Clean the distro plate only with microfiber cloths to avoid scratches in the material. Do not use cleaners containing alcohol to avoid stress cracks in the material. Before installing the distro plate, it is recommended to rinse the distro plate to remove any last residues. Acrylic paints can leave residues.

9. SUPPORT AND SERVICE

Contact

Stealkey Customs

Mail: support@stealkeycustoms.de

Instagram: <https://www.instagram.com/stealkeycustoms>

Website: <https://www.stealkeycustoms.de>

FAQ: <https://www.stealkeycustoms.de/pages/faq>

